


# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## RD Wide Temperature Range Series


- Standard series for general purpose
- High CV value
- Wide operating temperature range of -55 ~ +105°C
- Complied to the RoHS directive

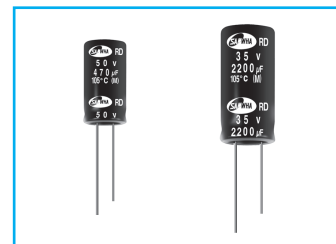

| Item   | Characteristics  |                                   |      |      |            |              |                               |      |         |              |         |  |
|--|--|-----------------------------------|------|------|------------|--------------|-------------------------------|------|---------|--------------|---------|--|
| Operating temperature range  | WV   | 6.3 ~ 100                         |      |      |            | 160 ~ 450    |                               |      |         | 500          |         |  |
|  | Temperature range  | -55 ~ +105°C                      |      |      |            | -40 ~ +105°C |                               |      |         | -25 ~ +105°C |         |  |
| Leakage current max.   | WV ≤ 100   |                                   |      |      |            |              | WV > 100                      |      |         |              |         |  |
|  | I = 0.01CV or 3µA whichever is greater (after 2 min)<br>I = 0.03CV or 4µA whichever is greater (after 1 min)   |                                   |      |      |            |              | I = 0.02CV+15µA (after 5 min) |      |         |              |         |  |
| Capacitance tolerance  | ±20% at 120Hz, 20°C  |                                   |      |      |            |              |                               |      |         |              |         |  |
| Dissipation factor max. (at 120Hz, 20°C)                                   | Capacitance > 1000µF : tanδ increases by 0.02 for each 1000µF from below value.  |                                   |      |      |            |              |                               |      |         |              |         |  |
|  | WV   | 6.3                               | 10   | 16   | 25         | 35           | 50                            | 63   | 100     | 160~250      | 350~500 |  |
| tanδ   | 0.28   | 0.24                              | 0.20 | 0.16 | 0.14       | 0.12         | 0.10                          | 0.08 | 0.15    | 0.20         |         |  |
| Low temperature characteristics (Impedance ratio at 120Hz)                 | WV   | 6.3                               | 10   | 16   | 25         | 35           | 50~100                        | 160  | 200~350 | 400~450      | 500     |  |
|  | Z-25°C/Z+20°C  | 5                                 | 4    | 3    | 2          | 2            | 2                             | 4    | 6       | 10           | 12      |  |
|  | Z-40°C/Z+20°C  | 12                                | 10   | 8    | 5          | 4            | 3                             | 6    | 8       | 12           | —       |  |
| Load life (after application of the rated voltage for 2000 hours at 105°C) | Leakage current  | Less than specified value         |      |      |            |              |                               |      |         |              |         |  |
|  | Capacitance change   | Within ±20% of initial value      |      |      |            |              |                               |      |         |              |         |  |
|  | tanδ   | Less than 200% of specified value |      |      |            |              |                               |      |         |              |         |  |
|  | ∅D   | ∅D ≤ 8                            |      |      |            | ∅D ≥ 10      |                               |      |         |              |         |  |
| Life time  | 1000 hours   |                                   |      |      | 2000 hours |              |                               |      |         |              |         |  |
| Shelf life (at 105°C)  | After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4 |                                   |      |      |            |              |                               |      |         |              |         |  |

### DRAWING

Unit : mm

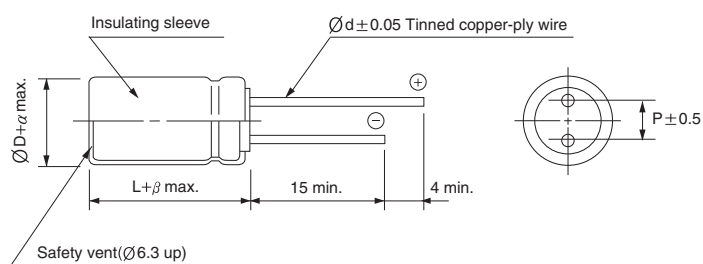

| ∅D | 5   | 6.3 | 8   | 10  | 12.5 | 16  | 18  | 22   |
|----|-----|-----|-----|-----|------|-----|-----|------|
| P  | 2.0 | 2.5 | 3.5 | 5.0 | 5.0  | 7.5 | 7.5 | 10.0 |
| ∅d | 0.5 | 0.5 | 0.6 | 0.6 | 0.6  | 0.8 | 0.8 | 1.0  |
| α  | 0.5 |     |     |     |      |     |     | 1.0  |
| β  | 1.5 |     | 2.0 |     |      |     | 3.0 |      |

### FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

| WV      | Frequency | 60Hz | 120Hz | 1kHz | 10kHz | 50kHz | 100kHz ≤ |
|---------|-----------|------|-------|------|-------|-------|----------|
| 6.3~100 | ~ 47      | 0.75 | 1.00  | 1.55 | 2.00  | 2.00  | 2.00     |
|         | 68 ~ 680  | 0.80 | 1.00  | 1.35 | 1.50  | 1.62  | 1.75     |
|         | 820 ~     | 0.85 | 1.00  | 1.15 | 1.15  | 1.32  | 1.50     |
| 160~500 | ~ 220     | 0.80 | 1.00  | 1.40 | 1.60  | 1.70  | 1.80     |
|         | 330 ~     | 0.90 | 1.00  | 1.13 | 1.15  | 1.32  | 1.50     |

RD series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

| WV<br>μF | WV              |                 |                 |                                    |                 |  |                 |                 |                |                |                |                |                |                |                |
|----------|-----------------|-----------------|-----------------|------------------------------------|-----------------|--|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|          | 6.3             | 10              | 16              | 25                                 | 35              | 50   | 63              | 100             | 160            | 200            | 250            | 350            | 400            | 450            | 500            |
| 2.2      |                 |                 |                 |                                    |                 | 5×11<br>24   | 5×11<br>26      | 5×11<br>26      | 6.3×11<br>23   | 6.3×11<br>23   | 6.3×11<br>23   | 8×11.5<br>28   | 8×11.5<br>28   | 10×12.5<br>27  |                |
| 3.3      |                 |                 |                 |                                    |                 | 5×11<br>29   | 5×11<br>32      | 5×11<br>32      | 6.3×11<br>29   | 6.3×11<br>29   | 8×11.5<br>34   | 8×11.5<br>34   | 10×12.5<br>39  | 10×16<br>36    |                |
| 4.7      |                 |                 |                 |                                    |                 | 5×11<br>35   | 5×11<br>38      | 5×11<br>38      | 6.3×11<br>34   | 8×11.5<br>40   | 8×11.5<br>40   | 10×12.5<br>47  | 10×12.5<br>47  | 10×16<br>43    | 10×16<br>59    |
| 6.8      |                 |                 |                 |                                    |                 | 5×11<br>42   | 5×11<br>46      | 5×11<br>46      | 8×11.5<br>49   | 10×12.5<br>56  | 10×12.5<br>56  | 10×16<br>62    | 10×16<br>62    | 10×20<br>56    | 10×16<br>72    |
| 10       |                 |                 |                 |                                    |                 | 5×11<br>51   | 5×11<br>56      | 5×11<br>56      | 10×12.5<br>68  | 10×12.5<br>68  | 10×12.5<br>68  | 10×16<br>75    | 10×20<br>82    | 12.5×20<br>80  | 12.5×20<br>88  |
| 15       |                 |                 |                 |                                    |                 | 5×11<br>62   | 5×11<br>68      | 6.3×11<br>78    | 10×16<br>92    | 10×16<br>92    | 10×16<br>92    | 10×20<br>100   | 12.5×20<br>118 | 12.5×25<br>107 | 12.5×30<br>115 |
| 22       |                 |                 |                 |                                    |                 | 5×11<br>75   | 5×11<br>83      | 6.3×11<br>95    | 10×16<br>111   | 10×16<br>111   | 10×20<br>121   | 12.5×20<br>143 | 12.5×25<br>155 | 16×25<br>144   | 16×25<br>159   |
| 33       |                 |                 |                 |                                    |                 | 5×11<br>92   | 6.3×11<br>116   | 8×11.5<br>137   | 10×20<br>149   | 10×20<br>149   | 12.5×20<br>175 | 12.5×25<br>190 | 16×25<br>211   | 16×31.5<br>193 | 16×31.5<br>207 |
| 47       |                 |                 |                 |                                    | ★ 5×11<br>96    | ★ 6.3×11<br>127  | 6.3×11<br>139   | 10×12.5<br>190  | 12.5×20<br>208 | 12.5×20<br>208 | 12.5×25<br>227 | 16×25<br>252   | 16×31.5<br>276 | 16×31.5<br>230 | 18×31.5<br>261 |
| 68       |                 |                 |                 | ★ 5×11<br>108                      | 6.3×11<br>132   | 8×11.5<br>180  | 8×11.5<br>197   | 10×16<br>251    | 12.5×25<br>273 | 16×20<br>279   | 16×25<br>303   | 16×31.5<br>332 | 18×35.5<br>373 | 18×31.5<br>285 | 18×35.5<br>335 |
| 82       |                 |                 |                 | 6.3×11<br>137                      | 6.3×11<br>145   | 8×11.5<br>198  | 8×11.5<br>216   | 10×20<br>290    | 12.5×25<br>302 | 16×25<br>333   | 16×31.5<br>364 | 18×35.5<br>369 | 18×40<br>387   | 18×31.5<br>327 | 18×40<br>370   |
| 100      |                 |                 | 5×11<br>119     | 6.3×11<br>151                      | 6.3×11<br>160   | 8×11.5<br>218  | 8×11.5<br>239   | 10×20<br>332    | 12.5×25<br>331 | 16×25<br>368   | 16×31.5<br>402 | 18×35.5<br>407 | 18×40<br>427   | 18×40<br>486   |                |
| 150      |                 | 5×11<br>134     | ★ 6.3×11<br>167 | 6.3×11<br>185                      | 8×11.5<br>231   | 10×12.5<br>310   | 10×12.5<br>340  | 12.5×20<br>477  | 16×25<br>450   | 16×35.5<br>517 | 18×35.5<br>554 | 18×40<br>523   | 22×41<br>596   |                |                |
| 220      | 5×11<br>146     | ★ 5×11<br>162   | 6.3×11<br>203   | 8×11.5<br>264                      | 8×11.5<br>280   | 10×12.5<br>376   | 10×16<br>451    | 12.5×25<br>630  | 16×31.5<br>596 | 18×35.5<br>671 | 18×40<br>694   | 22×41<br>721   |                |                |                |
| 330      | ★ 6.3×11<br>206 | 6.3×11<br>228   | 8×11.5<br>293   | 10×11.5<br>324                     | 10×12.5<br>399  | 10×16<br>504   | 10×20<br>603    | 16×25<br>856    | 18×35.5<br>822 | 18×40<br>850   | 22×41<br>968   |                |                |                |                |
| 470      | 6.3×11<br>246   | 6.3×11<br>272   | 8×11.5<br>349   | 10×12.5<br>449                     | 10×16<br>521    | 10×20<br>657   | 12.5×20<br>844  | 16×25<br>1021   | 18×40<br>1015  | 22×41<br>1155  |                |                |                |                |                |
| 680      | 8×11.5<br>348   | 10×12.5<br>449  | 10×12.5<br>488  | 10×16<br>591                       | 12.5×16<br>740  | 12.5×20<br>927   | 12.5×25<br>1107 | 16×31.5<br>1344 | 22×41<br>1390  |                |                |                |                |                |                |
| 820      | 8×11.5<br>382   | 10×12.5<br>493  | 10×16<br>587    | 10×20<br>708                       | 12.5×20<br>880  | 12.5×25<br>1050  | 16×25<br>1300   | 16×35.5<br>1627 |                |                |                |                |                |                |                |
| 1000     | 8×11.5<br>422   | 10×12.5<br>544  | 10×16<br>648    | 10×20<br>820                       | 12.5×20<br>974  | 12.5×25<br>1226  | 16×25<br>1490   | 18×40<br>1925   |                |                |                |                |                |                |                |
| 1500     | 10×16<br>621    | 10×16<br>680    | 12.5×16<br>862  | 12.5×20<br>1017                    | 16×20<br>1188   | 16×25<br>1442  | 16×35.5<br>1770 |                 |                |                |                |                |                |                |                |
| 2200     | 10×20<br>778    | 10×20<br>844    | 12.5×20<br>1055 | 12.5×20<br>1100<br>12.5×25<br>1235 | 16×25<br>1426   | 16×31.5<br>1442  | 16×35.5<br>1770 |                 |                |                |                |                |                |                |                |
| 3300     | 12.5×16<br>983  | 12.5×20<br>1148 | 12.5×25<br>1323 | 16×25<br>1562                      | 16×35.5<br>1857 | 16×35.5<br>1794  | 18×40<br>2689   |                 |                |                |                |                |                |                |                |
| 4700     | 12.5×20<br>1219 | 12.5×25<br>1421 | 16×25<br>1657   | 16×31.5<br>1916                    | 18×35.5<br>2224 | ← Case size ØD×L (mm)<br>← Ripple current (mA rms) at 105°C, 120Hz |                 |                 |                |                |                |                |                |                |                |
| 6800     | 12.5×25<br>1480 | 16×25<br>1737   | 16×31.5<br>1982 | 18×35.5<br>2335                    |                 |  |                 |                 |                |                |                |                |                |                |                |
| 10000    | 16×25<br>1807   | 16×35.5<br>2172 | 18×35.5<br>2409 |                                    |                 |  |                 |                 |                |                |                |                |                |                |                |
| 15000    | 16×35.5<br>2233 | 18×35.5<br>2482 |                 |                                    |                 |  |                 |                 |                |                |                |                |                |                |                |
| 22000    | 18×40<br>2652   |                 |                 |                                    |                 |  |                 |                 |                |                |                |                |                |                |                |

Size Ø8×9 is available for capacitors marked "★"

# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS


**RD** series

## TYPICAL PERFORMANCE

— 16V 1000 $\mu$ F  
 ..... 400V 10 $\mu$ F


### ● TEMPERATURE CHARACTERISTICS

Capacitance change vs. temperature

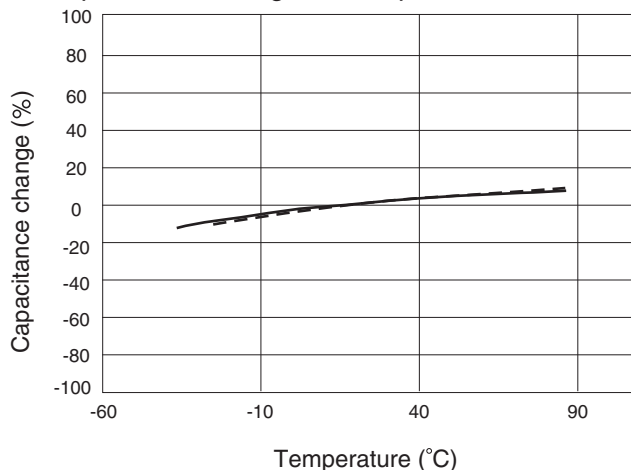


### ● LOAD LIFE (at +105°C)


Capacitance change vs. time

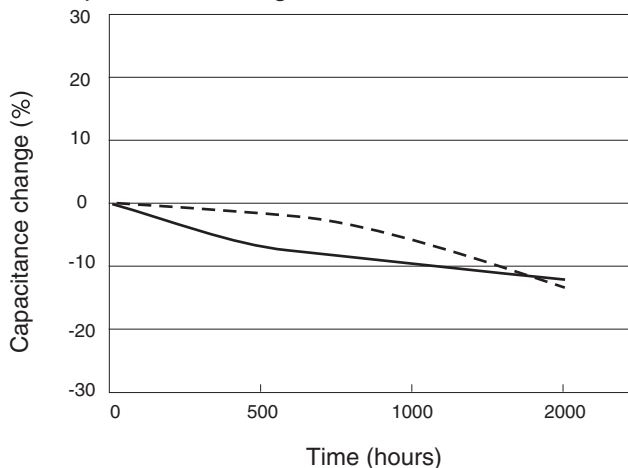

Dissipation factor vs. temperature

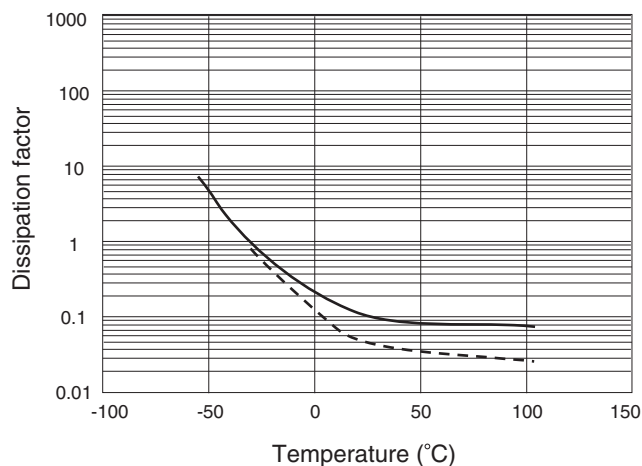


Dissipation factor vs. time

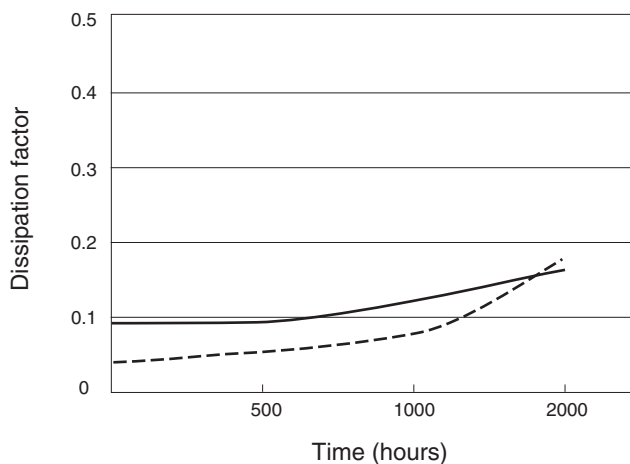

### ● FREQUENCY CHARACTERISTICS

Impedance vs. frequency

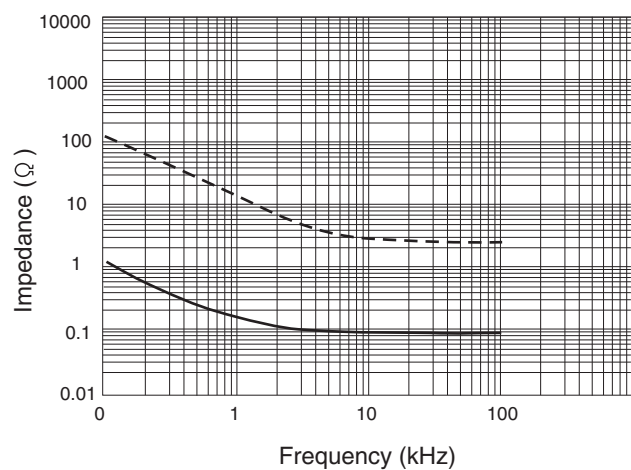

Leakage current vs. time

