

Thermal motor protector
Temperature control
Temperature limiter
Thermal protection for ballast

79F


79F

Applications

- Engines
- Transformers
- Converters
- Electronics, sensors
- For mass production

Benefits



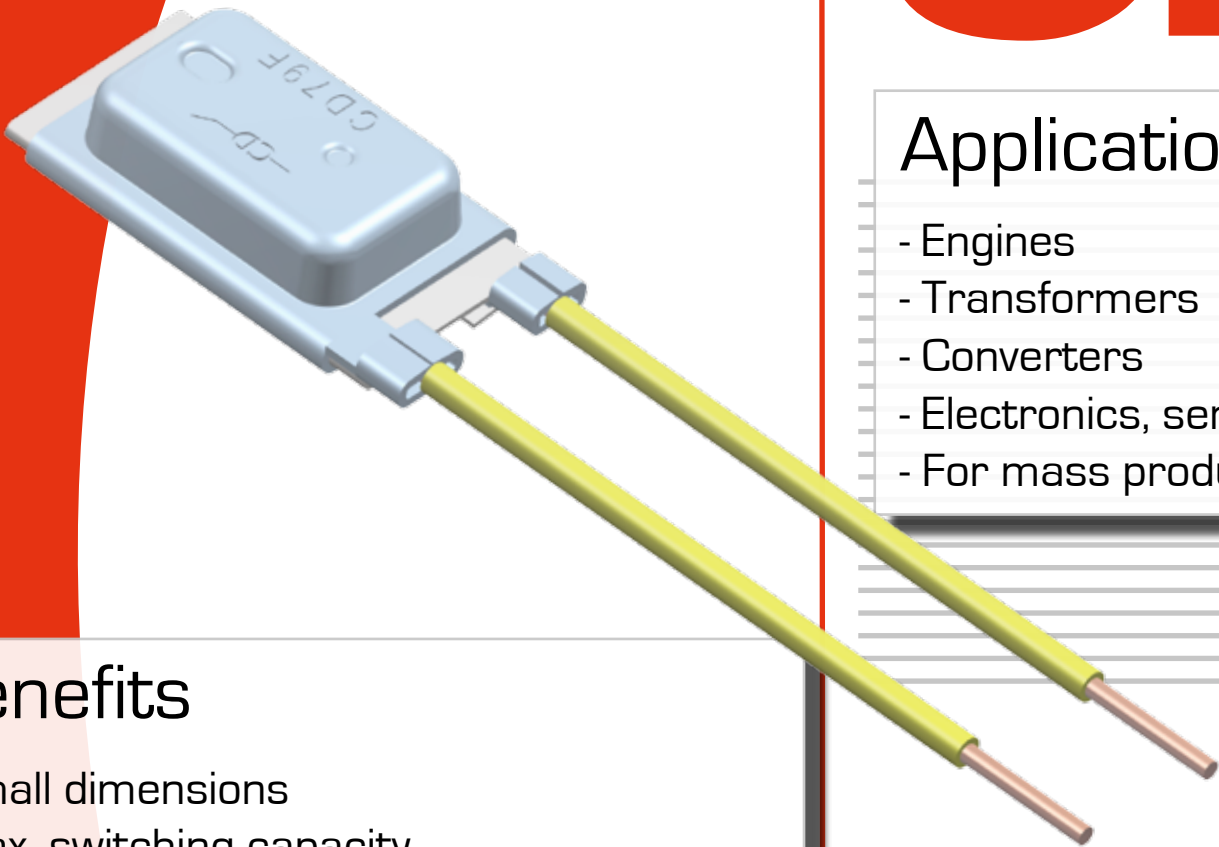

- Small dimensions
- Max. switching capacity
- Temperature and current sensitive
- Low contact resistance



MICROTHERM



Technical data

type ratings		control type	CD 79 F-series		
VDE	DIN EN 60730-2-9		rated current	switching cycles	temperature rating
			12 V DC 16A	10,000	
			120 V AC 16A	10,000	
			240 V AC 9A	10,000	
			250 V AC 2A	100,000	
			250 V AC 5A	35,000	
			250 V AC 3A, cos phi 0,4	10,000	
	250 V AC 10 A	10,000			
	DIN EN 60730-2-2		12 V DC	-	60°C to 180°C
			120 V AC		
250 V AC					
DIN EN 60730-2-3		250 V AC 3A	-	60°C to 180°C	
UL / cUL	UL 2111 UL 873		16 V DC 20A	10,000	60°C to 180°C
			120 V AC 22A, 60 HZ	10,000	
			120 V AC 5A, 60 HZ	100,000	
version	—○— normally closed				
tolerances	±5%, max. 7K				
contact resistance	≤ 50 mΩ				
housing material	nickel steel				
hysteresis	between 5K and 50K under response temperature				
housing insulation	optional				
degree of protection of enclosure (EN 60529)	IP 00				
suitable for use in protection category	I, II				
guidelines and norms	RoHS-conformity, REACH-conformity				


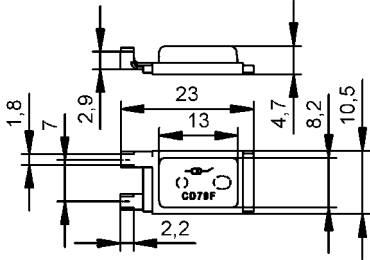
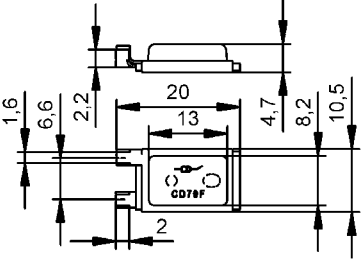
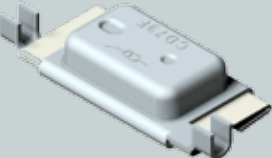
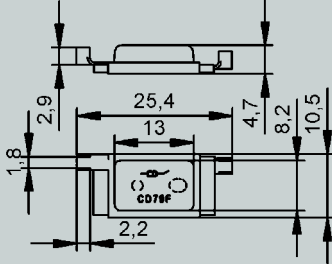
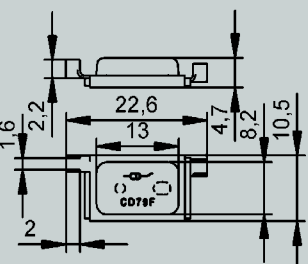
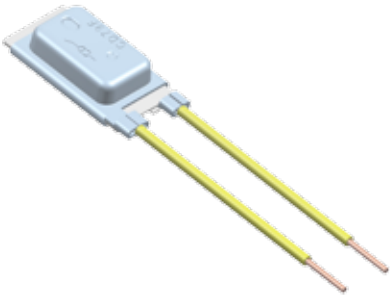
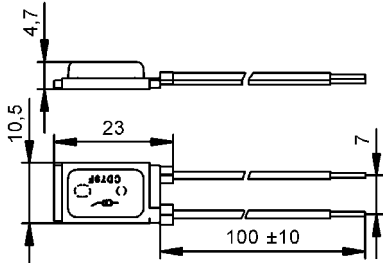
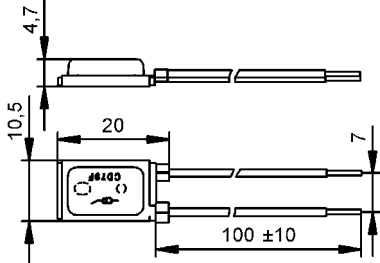
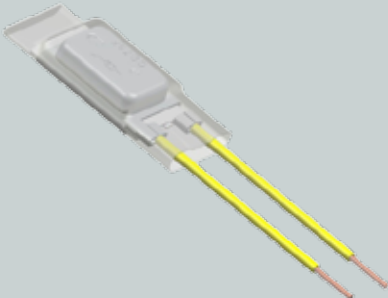
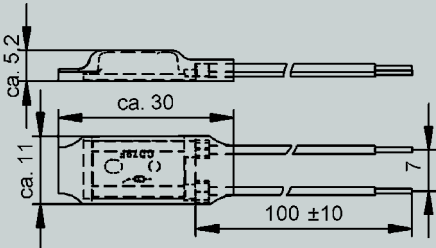
Standard leads

lead	code	temperature max.	operating voltage max.	approx. diameter insulation	approx. cross section diameter	UL style
leads white	L310	150°C	300 V	1,82 mm	AWG 20 / 0,48 mm ²	3398
	L370	200°C	600 V	1,60 mm	AWG 20 / 0,48 mm ²	10086
leads white	L320	150°C	300 V	2,10 mm	AWG 18 / 0,81 mm ²	3398
	L380	200°C	600 V	1,80 mm	AWG 18 / 0,96 mm ²	10086


Standard length 100 mm ± 10 mm, stripped insulation 6 ± 1 mm.

Leads or solid wires are available in various lengths, cross-sections and qualities.

The temperature rating of the connecting leads covers the nominal response temperature of the cutout as a minimum.


switch type	illustration	standard VDE / UL dimensions (mm)	standard UL / cUL dimensions (mm)
<p>CD79F A Crimp connection</p> <p>A = connection both one end</p>			
<p>CD 79F B crimp connection</p> <p>B = connection opposite ends</p>			
<p>CD79F A Crimp connection with leads</p> <p>A = connection both one end</p>			
<p>CD79F A Crimp connection with leads and insulation</p> <p>Available with various insulations (for example Nomex-Mylar)</p> <p>A = connection both one end</p>			

Temperature-current-response time curve

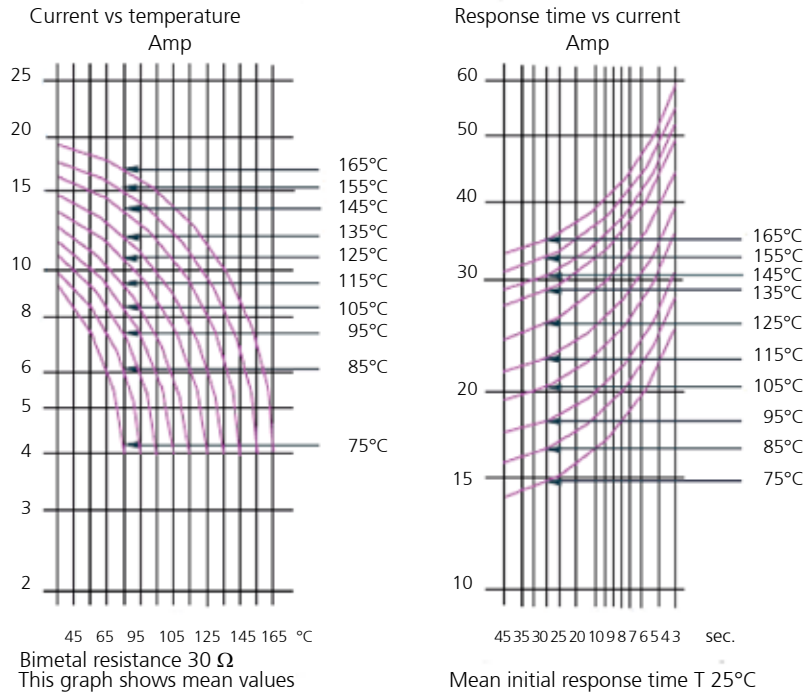

Ordering and marking example

Ordering example standard execution

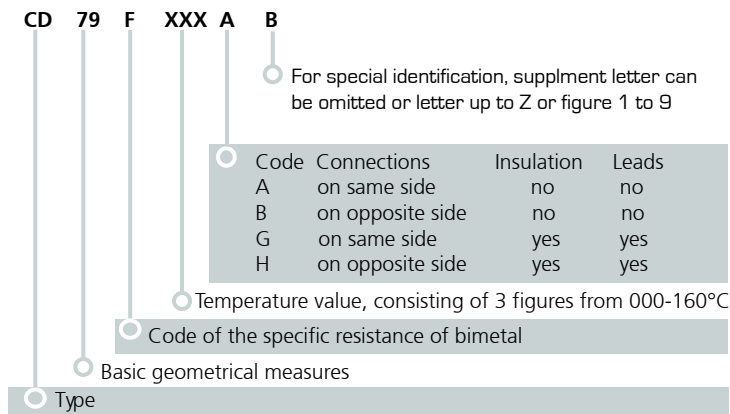

Marking example

CD79F Switch type
100°C ±10 K Temperature (100°C), tolerance (±10K)
A Execution



Representation office:

Microtherm GmbH
 Taeschenwaldstraße 3
 Postfach 1208
 D-75112 Pforzheim

Fon: +49 (0)7231 787-0
 Fax: +49 (0)7231 787-155
 E-Mail: info@microtherm.de
 Internet: www.microtherm.de

Deviations from standard controls on request.

MICROTHERM

